

EVOline® EnviroLight



The Principle:

Durable and energy-saving LEDs provide your work area with non- blinding lighting.

The on / off switch with Touch sensor technology has an integrated dimmer function.



Surface Variations:



Silver

EVOLine® EnviroLight

The V-shaped profile can be customised in length and setup to your request.

A choice with LEDs, power sockets out of our wide range of modules can be inserted.






The light colours:
Neutral White (3700-5000 K)
or Warm White (2600-3700 K).



Special feature:

Optional
RGB lighting effects
Red-Green-Blue
separately activated.
Changer with many
available modes.



Article	Picture	Type
<p>EVOLine® EnviroLight SMALL V-Dock, housing made of Aluminium Silver anodised Mounted with profile holder, three LEDs are dimmable with sensor module On / Off switch, illuminated in Blue, supply cable 2,5 m Plug supplied loose Length 450 mm</p>		<p>Silver profile holder, LED neutral white 1593 6022 4310</p> <p>Silver profile holder, LED warm white 1593 6022 4320</p> <p>ALANOX® profile holder, LED neutral white 1593 6023 4310</p> <p>ALANOX® profile holder, LED warm white 1593 6023 4320</p>
<p>EVOLine® EnviroLight SMALL ENERGY V-Dock, housing made of Aluminium Silver anodised Mounted with profile holder, two LEDs are dimmable with sensor module On / Off switch, illuminated in Blue, two sockets, 0°, 16 A, with contact protection Germany, Austria 2) supply cable 2,5 m plug supplied loose Length 450 mm</p>		<p>Silver profile holder, LED neutral white 1593 6022 5310</p> <p>Silver profile holder, LED warm white 1593 6022 5320</p> <p>ALANOX® profile holder, LED neutral white 1593 6023 5310</p> <p>ALANOX® profile holder, LED warm white 1593 6023 5320</p>
<p>EVOLine® EnviroLight MEDIUM V-Dock, housing made of Aluminium Silver anodised Mounted with profile holder, four LEDs are dimmable with sensor module On / Off switch, illuminated in Blue, supply cable 2,5 m plug supplied loose Length 600 mm</p>		<p>Silver profile holder, LED neutral white 1593 6022 6310</p> <p>Silver profile holder, LED warm white 1593 6022 6320</p> <p>ALANOX® profile holder, LED neutral white 1593 6023 6310</p> <p>ALANOX® profile holder, LED warm white 1593 6023 6320</p>
<p>EVOLine® EnviroLight MEDIUM ENERGY V-Dock, housing made of Aluminium Silver anodised Mounted with profile holder, three LEDs are dimmable with sensor module On / Off switch, illuminated in Blue, two sockets, 0°, 16 A, with contact protection Germany, Austria 2) supply cable 2,5 m plug supplied loose Length 600 mm</p>		<p>Silver profile holder, LED neutral white 1593 6022 7310</p> <p>Silver profile holder, LED warm white 1593 6022 7320</p> <p>ALANOX® profile holder, LED neutral white 1593 6023 7310</p> <p>ALANOX® profile holder, LED warm white 1593 6023 7320</p>
<p>EVOLine® EnviroLight LARGE V-Dock, housing made of Aluminium Silver anodised Mounted with profile holder, six LEDs are dimmable with sensor module On / Off switch, illuminated in Blue, supply cable 2,5 m, plug supplied loose Length 1200 mm</p>		<p>Silver profile holder, LED neutral white 1593 6022 8310</p> <p>Silver profile holder, LED warm white 1593 6022 8320</p> <p>ALANOX® profile holder, LED neutral white 1593 6023 8310</p> <p>ALANOX® profile holder, LED warm white 1593 6023 8320</p>

2) Appropriate socket types for international requirements can be found on page 203

EVOLine® EnviroLight

Article

**EVOLine® EnviroLight
LARGE ENERGY**
V-Dock, housing made of Aluminium
Silver anodised
Mounted with profile holder,
six LEDs are dimmable with sensor
module
On / Off switch, illuminated in Blue,
four sockets, 0 °, 16 A,
with contact protection
Germany, Austria 2)
supply cable 2,5 m
plug supplied loose
Length 1200 mm

Picture



Type

Silver profile holder, LED neutral white
1593 6022 9310
Silver profile holder, LED warm white
1593 6022 9320
ALANOX® profile holder, LED neutral white
1593 6023 9310
ALANOX® profile holder, LED warm white
1593 6023 9320

**EVOLine® EnviroLight
LARGE AMBIENTE**
V-Dock, housing made of Aluminium
Silver anodised
Mounted with profile holder,
six LEDs are dimmable with sensor
module On / Off switch, illuminated in
Blue, RGB lighting effects,
six colours on selected key
including RGB generator and
On / Off switch, illuminated in Blue
four sockets, 0 °, 16 A,
with contact protection
Germany, Austria 2)
supply cable 2,5 m
plug supplied loose
Length 1200 mm







Silver profile holder, LED neutral white
1593 6023 0310
Silver profile holder, LED warm white
1593 6023 0320
ALANOX® profile holder, LED neutral white
1593 6024 0310
ALANOX® profile holder, LED warm white
1593 6024 0320

neutral white 3700 - 5000 K
warm white 2600 - 3700 K



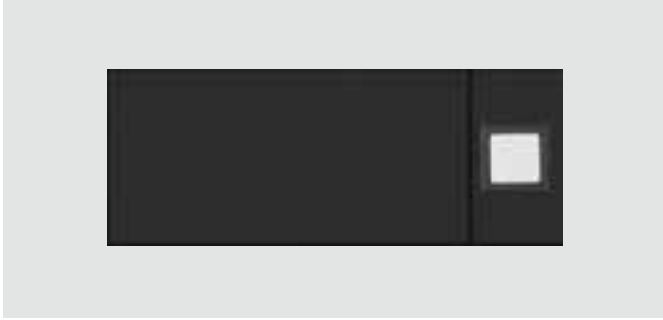

Technical changes
reserved.

EVOLine® EnviroLight INDIVIDUAL

Tailor-made plan
Your EVOLine® EnviroLight
according to your
wishes on request.

Article	Picture	Type
<p>EVoline® Light Control (LED) Energy supply for up to 6 LED Light Module Integrated into the first light module</p> <p>Technical information Input voltage 230 volts Power consumption: max. 13 Watt (6 = a 1.5 watt LEDs) Installation dimension: 75 x 50 mm Black</p>		9330 8610 0000
<p>EVoline® Light Control (LED) Energy supply for up to 6 LED Light Module Integrated into the first light module</p> <p>Technical information Input voltage 230 volts Power consumption: max. 13 Watt (6 = a 1.5 watt LEDs) Installation dimension: 75 x 50 mm (ALANOX®)</p>		9330 8640 0000
<p>EVoline® Light Module (LED) LED lighting module with a brightness of 500 lux on the countertop is a max. distance of 75 mm between the individual light modules not to be exceeded. Power: 1.5 Watt Installation dimension: 75 x 50 mm Black</p>		9330 8620 0000
<p>EVoline® Light Module (LED) LED lighting module with a brightness of 500 lux on the countertop is a max. distance of 75 mm between the individual light modules not to be exceeded. Power: 1.5 Watt Installation dimension: 75 x 50 mm (ALANOX®)</p>		9330 8650 0000

EVoline® EnviroLight Modules

Article	Picture	Type
<p>EVoline® Light Sensor (LED) ON / OFF switch with dimming sensor function for LED Light Module. Connected before the LED Light Control Module. Installation dimension: 50 x 50 mm Black</p>		9330 8630 0000
<p>EVoline® Light Sensor (LED) ON / OFF switch with dimming sensor function for LED Light modules. Connected before the LED Light control module. Installation dimension: 50 x 50 mm (ALANOX®)</p>		9330 8660 0000
<p>EVoline® RGB Generator by push button and integrated power supply energy supplies for the RGB lighting effects. Light source controlled by switch Various colours can be selected Technical details: RGB generator 2.5W, integrated power supply: 24 V DC / 25 W Primary: 180 V-265 V ~ / 50-60 Hz Output: PWM signal max. 25 W Max 4 EVoline® RGB Lighting effect lights Installation dimension: 155 x 50 mm Black</p>		9330 8590 0000
<p>EVoline® RGB Generator by push button and integrated power supply energy supplies for the RGB lighting effects. Light Source Controlled by switch Various colours can be selected Technical details: RGB generator 2.5W, integrated power supply: 24 V DC / 25 W Primary: 180 V-265 V ~ / 50-60 Hz Output: PWM signal max. 25 W Max 4 EVoline® RGB Lighting effect lights Installation dimension: 155 x 50 mm Stainless Steel (ALANOX®)</p>		9331 0590 0000
<p>EVoline® RGB-lighting effects serves as the background illumination or guide in the dark rooms.</p> <p>Technical information Input voltage 24 volts DC, 200 mA Power consumption max. 5 Watt Viewing angle 115 ° Assembly strip of light with 20 RGB LEDs Installation dimension: 450 x 10 x 5.5 mm Only built-in profile available.</p>	<p>Not shown Concealed mounting, see illustration page 131</p>	9330 8600 0000